

(19)



(11)

EP 3 741 453 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
25.11.2020 Bulletin 2020/48

(51) Int Cl.:
B01F 5/06 (2006.01)

(21) Application number: **19176360.6**

(22) Date of filing: **24.05.2019**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **Mansour, Michael**
39104 Magdeburg (DE)
• **Thévenin, Dominique**
39108 Magdeburg (DE)

(74) Representative: **Ahrens, Gabriele**
Patentanwälte Einsel & Kollegen
Jasperallee 1A
38102 Braunschweig (DE)

(71) Applicant: **Otto-von-Guericke-Universität**
Magdeburg
39106 Magdeburg (DE)

(54) MIXING DEVICE WITH REVERSED COILED CONFIGURATION AND USE THEREOF

(57) The present invention relates to a tubular mixing device (6) with reversed coiled configuration (also referred to as "coiled flow reverser" CFR)) wherein after a

number n of turns (2) with $n=1$; 2 the flow path is reverted to the opposite direction, and wherein the device (6) has an overall straight coil axis.

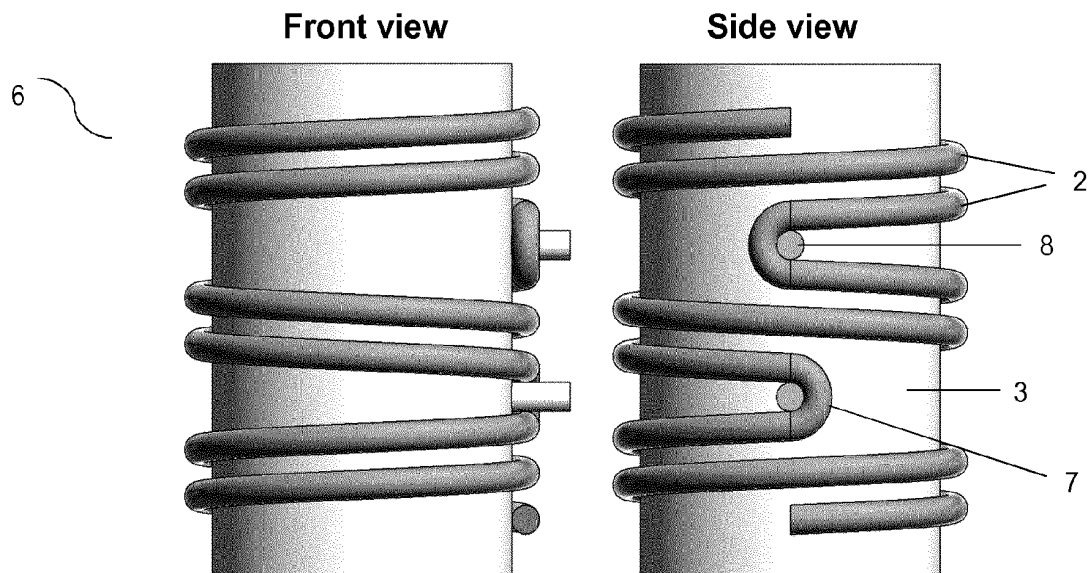


Fig. 3

EP 3 741 453 A1

Description

[0001] The present invention relates to a tubular mixing device with reversed coiled configuration.

[0002] Flow mixing is very important for numerous industrial processes and applications, including chemical industry, pharmaceutical industry, paper industry, food processing, waste water treatment, and heat and mass transfer applications.

[0003] In laminar flow through a tube, a parabolic velocity profile is established over the cross-section with a maximum velocity in the center of the flow and a velocity of 0 at the walls due to adhesion, which results in a very broad residence time distribution over the cross-section along with poor mixing. When a fluid flows through a helically coiled pipe, centrifugal force acts on the fluid. The centrifugal forces induces secondary flows (known as Dean vortices) which leads to improved mixing efficiency. There are known different types of helical configurations of mixers in order to enhance mixing.

[0004] Helical pipes offer very efficient mixing even in the laminar regime with low pressure drop and minimal maintenance, i. e. without moving parts, compared to the use of active mixers such as stirrers etc.. The presence of secondary flows in such helical pipes can strongly enhance radial mixing and provide narrower residence time distributions over the profile cross-section.

[0005] US 7,337,835 B2 to Nigam relates to a heat exchanger for transferring heat from one fluid to another fluid with a coiled configuration referred to "coiled-flow-inverter" (CFI). This configuration is based on the principal of flow inversion by successive bending of helical coils, so that the direction of the centrifugal force (secondary flow) can be regularly inverted resulting in improved radial mixing compared to a straight coil. The CFI comprises four discrete helically coiled tubes, each coiled tube having at least four turns, wherein the axis of each helical coil is bent at an angle of 90° with respect to the axis of the adjacent helical coil. The use of several bends at a right angle causes multiple flow inversion of the fluid, resulting in enhanced heat transfer, narrowing of residence time distribution along with good radial mixing.

[0006] A plurality of different helical structures and geometrical modifications were developed to improve mixing, such as pipes with rectangular or non-circular cross-sections Ref. 1, contraction-expansion pipes Ref. 2, strongly modified flow paths Ref. 3, and combination of complex, chaotic structures such as the CFI referred to above or Ref. 4.

[0007] However, in helical and coiled-flow inverters flow mixing and heat transfer decrease continuously with the increase of flow velocity expressed as Reynolds number (Re), due to the reduction of residence time of the fluids within the mixing device. Further, efficiency of flow mixing in helical pipes was found to be strongly dependent on the initial orientation of the liquids interface with respect to the coil axis at the inlet surface of the pipe.

Moreover, the performance of a CFI with only few inversions was found to be very close to the simple straight helical pipe. Finally, in most cases a significant enhancement of flow mixing was only possible with a high number of flow inversions and/or by strong modifications of the geometry, increasing considerably productions cost and complexity. Additionally, a significant increase of pressure drop was observed, which might not be suitable for many practical applications and results in larger pumping requirements and operation costs.

[0008] Thus, it was the object of the present invention to provide a mixing device with coiled configuration providing improved flow mixing along with only low or economically acceptable pressure drop, efficient heat transfer and having a simple design without the need of cost intensive complex structures and inserts.

[0009] This object is achieved by a mixing device with a helical structure wherein the coiling direction is reversed after each single turn or each second turn.

[0010] Reversal of coiling direction means a change of flow path to the opposite direction with respect to the direction of flow path in the preceding turn.

[0011] That is, in the helical mixing device of the present invention, coiling direction is reversed after a number of n windings with $n=1$; 2.

[0012] Preferably $n=1$.

[0013] By reversal of the coiling direction after each single or at most second turn formation of a fully-developed flow is prevented and the flow is maintained in the developing more disturbed condition. It was observed by the present inventors that flow mixing and thermal homogenization in helical pipes are significantly higher and faster in the entrance region (typically the first two coil turns) rather than in the fully-developed flow region. Consequently, according to the present invention a helical mixing device is provided having many developing regions with consecutive locations of high mixing rate.

[0014] In the "coiled flow reverser" (CFR) of the present invention the flow is continuously redirected in a structured and compact way, thereby avoiding high operation and production costs of other geometries like chaotic ones. In the CFR the coiling direction is rapidly and completely reversed, creating a more complex secondary flow, and enhancing significantly mixing and heat transfer. Moreover, even at high Reynolds number, such as $Re=3000$, despite the strongly reduced residence time associated therewith, excellent flow mixing can be obtained with slight increase of pressure drop of a maximum of only up to 9 % higher than that in straight helical coils.

[0015] Apart from improved mixing efficiency also a significant improvement of heat transfer is observed. For example, as the Reynolds number increases heat transfer is continuously enhanced compared to the straight helical coil, with, for example 5 % increase in the outlet temperature at $Re=3000$ even in a short CFR with only three turns, corresponding to two reversals.

[0016] An important parameter having a strong influence on mixing efficiency of a curved or coiled mixer de-

sign is the orientation of the fluids interface with respect to the coil axis at the inlet surface of the mixing device. For example, in a conventional straight helical coil a parallel orientation of the fluids interface with respect to the coil axis at the inlet surface provides the best mixing efficiency whereas the worst mixing efficiency is obtained with the other extreme case, the perpendicular orientation (see figure 4, left and right, respectively). These two cases correspond to the limit cases of best and poorest mixing in a straight helical coil. The reason is, in a straight helical coil the mixing efficiency is significantly higher when the generated secondary vortices are optimally perpendicular to the inlet surface as is the case with the parallel orientation of the fluids interface with respect to the coil axis (see figure 4, left). To the contrary, the mixing efficiency of the present CFR does not show such strong dependency on the orientation of the fluids interface at the inlet surface. In particular, for high Re-numbers such as $Re \geq 500$ improved flow mixing is achieved with the CFR. Even for Re as high as 3000 the mixing efficiency in the present CFR is still very close to 100 % despite the strongly reduced residence time.

[0017] That is, with the present CFR, a wide range of orientation of the fluids interface with respect to the coil axis at the inlet surface is feasible without particular impairment of performance in terms of mixing efficiency and pressure drop even at high Re-numbers.

[0018] However, in view of optimal alignment of the developing Dean vortices a parallel or near parallel orientation is preferred.

[0019] In the following the present invention is explained in more detail with reference to the accompanying figures, wherein is shown in

Figure 1 a front view of a prior art conventional straight helical coil,

Figure 2 a front view of a coiled flow inverter (CFI),

Figure 3 a front and side view of an exemplary embodiment of the coiled-flow reverser (CFR) of the present invention,

Figure 4 schematically the two extreme cases with parallel and perpendicular orientation of the fluids interface with respect to the coil axis at the inlet surface together with the secondary flow lines,

Figure 5a, b a comparison of final mixing coefficient at the outlet surface as a function of Re for (a) 6-turn configurations and (b) 3-turn configurations with parallel initial interface (i) and perpendicular initial interface (ii),

Figure 6a, b a comparison of surface-averaged out-

let temperature as a function of Re (left), and relative increase in temperature compared to a straight coil (right) for (a) 6-turn configurations and (b) 3-turn configurations with (i) surface-averaged outlet temperature and (ii) percent increase in temperature, and

Figure 7 a comparison of pressure drop per unit length as a function of Re for (a) 6-turn configurations and (b) 3-turn configurations.

[0020] **Figure 1** shows a conventional straight helical coil 1 with 6 turns 2 coiled around a cylindrical carrier member 3, with coil pitch p, pipe diameter d and coil diameter D.

[0021] The known coiled-flow inverter (CFI) 4 with an overall of 6 turns 2 with two turns per arm 5 is shown in **figure 2**.

[0022] The CFI is coiled around a cylindrical carrier member 3 composed of 3 arms 5 with two 90° bends with respect to the coil axis.

[0023] After each two turns 2 the coil is bent at an angle of 90° with respect to the coil axis.

[0024] The configuration of the CFI of figure 2 is used in the following examples for a comparison with the performance of the present CFR having also 6 turns with a reversal of coiling direction after each second turn.

[0025] An exemplary embodiment of the coiled-flow reverser (CFR) 6 of the present invention with an overall of 6 turns 2 with a reversal of coiling direction (redirection point 7) after each second turn is shown in **figure 3**.

[0026] In the embodiment of figure 3 the coil of the CFR 6 is wound around a straight cylindrical carrier member 3.

[0027] For supporting redirection of the coil path at the point of redirection 7, redirection aids 8 can be provided around which the coiled tube is redirected to the opposite direction. The redirection aid 8 shown in figure 3 is a kind of lug projecting perpendicularly from the surface of the carrier member 3. The redirection aid 8 can have a cylindrical shape. Of course, any other shape can be also used which is helpful for redirecting the coiled pipe. In the embodiment shown in figure 3 the redirection aids 8 are positioned at regular distances along a line extending parallel to the coil axis of the CFR.

[0028] As becomes clear from a comparison of the CFR6 shown in figure 3 and the known CFI 4 shown in figure 2, the present CFR has a straight coil axis without bendings contrary to the CFI. This straight coil axis offers the advantage of being easily coiled along a straight carrier member 3 in its core, like a standard straight coil rather than bending of the coil along its extension as is the case in the CFI 4.

[0029] The dimensions of the CFR can be selected according to need, such as overall path length, pipe diameter, coil diameter, number of reversals etc.. The present CFR is particularly suitable for flow mixing and heat trans-

fer in the laminar flow regime with $10 \leq Re \leq 3000$, in particular $Re \geq 500$.

[0030] The absolute pitch of the coil of the CFR in both directions is the same, with the pitch distance between two adjacent turns with same flow direction being the same.

[0031] Any suitable design for a carrier member 3 can be used. As shown in figure 3, it can have a cylindrical shape, such as a solid rod or tube, the surface can be continuous or have openings, for example a mesh.

[0032] The following investigations relate to liquids, but the present invention is likewise suitable for fluids in general, such as gases.

Investigations

[0033] For a comparison of the mixing efficiency in particular in terms of flow mixing versus pressure drop and heat transfer numerical investigations were conducted with the present coiled flow reverser, a conventional straight helical pipe mixer and the coiled flow inverter.

[0034] Apart from the coiling geometry coil parameter were identical such as number of turns (3 turns and 6 turns, respectively), overall path lengths, coil pitch ($P = 16$ mm), pipe diameter ($d = 10$ mm) and coil diameter ($D = 118$ mm).

[0035] Further, in order to evaluate the influence of inlet orientation a parallel and perpendicular inlet orientation of the initial interface of the liquids to be mixed were examined.

[0036] The coils were tested over a range of Reynolds number (Re) of 10 to 3000 corresponding to a Dean number range of $3 \leq De \leq 900$.

[0037] Two identical miscible liquids (liquid 1, (L1) and liquid 2 (L2)) were used, having the physical properties of water (density $\rho = 998.2$ kg/m³, dynamic viscosity $\mu = 1.003 \cdot 10^{-3}$ Pa.s. To differentiate between the liquids L1 was marked with a numerical tracer.

[0038] For accomplishment and evaluation of the investigations explicit reference is made to Ref. 5 and Ref. 6.

[0039] The mixing efficiency between the two liquids (also referred to mixing coefficient Mc) was determined, where Mc can vary from 0 to 1 with 0 indicating no mixing at all (0 % mixing efficiency) and 1 indicating complete mixing (100 % mixing efficiency).

[0040] As shown in figure 4 two different inlet configurations (parallel (left side) and perpendicular (right side)) were tested at the inlet surface. For this purpose, the inlet surface was split into two halves by a straight line, either parallel or perpendicular to the coil axis 9, each half being occupied by only one liquid. These two cases correspond to the limit cases of best and poorest mixing in a straight helical pipe.

[0041] The orientation of the streamlines of secondary flow (Dean vortices) with respect to the inlet surface are illustrated in the bottom figures.

Mixing efficiency

[0042] The final mixing coefficient obtained at the outlet of all configurations as function of Re was compared. In figure 5 the final mixing coefficient of (a) the 6-turn and (b) the 3-turn configurations, considering (i) parallel and (ii) perpendicular initial interfaces is shown. As can be seen the parallel interface led generally to higher mixing coefficient. As mentioned above, the interface orientation has a severe influence on the mixing efficiency of the standard helical pipe while its influence is less pronounced for CFI and CFR. For the parallel interface (i), the present CFR produced a perfect mixing ($Mc > 0.99$) for the whole range of $Re \geq 50$. Even for the maximum $Re = 3000$ the mixing coefficient of the CFR was not decreased in spite of the strong reduction of residence time.

[0043] It can be observed that the mixing coefficient of the CFI shows a smooth and stable behavior along the whole range of $Re \geq 50$, independently from the initial interface. The mixing coefficient of the CFR shows stronger fluctuations, but becomes systemically better than CFI for $Re \geq 500$; for this condition, excellent mixing were obtained by the CFR for all cases.

Comparison of heat transfer

[0044] The heat transfer performance and thermal homogenization of all three coiled configurations were compared.

[0045] The entering liquids were assumed to be close to room temperature ($T = 27$ °C) at the inlet section. The working fluid was water, with a Prandtl number of $Pr = \mu c_p / k = 6.7$, where c_p is the specific heat and k is the thermal conductivity. A constant-wall-temperature boundary condition was used for the walls with $T_w = 77$ °C (initial temperature difference of 50 °C).

[0046] In figures 6a, b the surface-averaged outlet temperature for all configuration was compared as a function of Re . As can be seen, the outlet temperature was constant and equal to the wall temperature for all geometries as long as $Re \leq 100$; in this case perfect heat transfer was obtained due to the long residence time. However, for higher values of Re , i. e. shorter residence time, the CFI and the CFR showed better heat transfer and thermal homogenization in terms of higher averaged outlet temperatures. This effect was more pronounced in the 3-turn configurations (figure 6b), when re-directing the coil path after each turn in the CFI and the CFR.

[0047] Figures 6a (ii) and 6b (ii) show the percentage increase in outlet temperature of the CFI and CFR compared to that of the straight coil. In the CFI and the CFR the heat transfer enhancement compared to the standard straight coil was continuously increasing for increasing Re . In all cases the present CFR showed the highest surface-averaged outlet temperature and, thus, the best heat transfer and thermal homogenization. For example, compared to a straight helical coil at $Re \geq 2.000$ an in-

crease in outlet temperature exceeding 5 % was observed in the CFR.

Pressure drop

[0048] As shown in figure 7a, b the pressure drop per unit length was compared for (a) the 6-turn configurations and (b) the 3-turn configurations.

[0049] As can be seen in figure 7a the pressure drop in the CFI and the CFR were very similar to that of a straight coil when re-directing the coiling after two turns.

[0050] In the 3-turn configuration (figure 7b) with a reversal of coiling after every single turn a slight but visible increase in the pressure drop per unit length was observed for the CFR, particularly at very high Reynolds numbers ($Re = 3000$), with a relative increase in pressure drop up to a maximum of 9 % compared to that of the straight coil.

[0051] Summarizing, the present CFR and CFI, showed similar superior mixing efficiencies for low and moderate Re ($10 \leq Re \leq 500$).

[0052] At higher values of $Re > 500$ the present CFR showed much more mixing than the straight coil and CFI, despite of a strongly reduced residence time.

[0053] Additionally, CFR showed a systematically improved heat transfer.

[0054] The present CFR provides an efficient mixing device in coil configuration with a simple design resulting in economically costs.

Reference numbers

[0055]

- 1 straight helical coil (prior art)
- 2 turn
- 3 carrier member
- 4 coiled flow inverter (CFI)
- 5 arm
- 6 coiled flow reverser (CFR)
- 7 re-direction point
- 8 re-direction aid
- 9 coil axis

- P coil pitch
- d pipe (tube) diameter
- D coil diameter

References cited

[0056]

Ref. 1

F. Jiang, K. S. Drese, S. Hardt, M. Küpper, F. Schonfeld, Helical flows and chaotic mixing in curved micro-channels, *AIChE J.* 50 (9) (2004) 2297-2305.

Ref. 2

L. Dong, Z. Shufen, Numerical and experimental investigation of the effect of geometrical parameters on the performance of a contraction-expansion helical mixer, *Int. J. Chem. React. Eng.* 12 (1) (2014) 465-475.

Ref. 3

Y. Lasbet, B. Auvity, C. Castelain, H. Peerhossaini, Thermal and hydrodynamic performances of chaotic mini-channel: application to the fuel cell cooling, *Heat Transfer Eng.* 28 (8-9) (2007) 795-803.

Ref. 4

A. Alam, K.-Y. Kim, Analysis of mixing in a curved micro-channel with rectangular grooves, *Chem. Eng. J.* 181 (2012) 708-716.

Ref. 5

M. Mansour, Z. Liu G. Janiga, K. D. P. Nigam, K. Sundmacher, D. Thevenin, K. Zähringer, Numerical study of liquid-liquid mixing in helical pipes, *Chem. Eng. Sci.* 172 (2017) 250-261.

Ref. 6

M. Mansour, G. Janiga, K. D. P. Nigam, D. Theevnin, K. Zähringer, Numerical study of heat transfer and thermal homogenization in a helical reactor, *Chem. Eng. Si.* 177 (2018) 369-379.

Claims

1. Tubular mixing device (6) with coiled configuration, **wherein** coiling direction is reverted to the opposite direction after number n of turns (2) with $n=1$; 2 at a re-direction point (7) and having a straight coil axis (9).
2. Tubular mixing device (6) with coiled configuration according to claim 1, further comprising a carrier member (3) onto which the coiled configuration is wound.
3. Tubular mixing device (6) with coiled configuration according to claims 1 or 2, comprising at least one re-direction aid (8) arranged at a re-direction points (7).
4. Tubular mixing device (6) with coiled configuration according to claim 3, **wherein** two or more re-direction aids (8) are arranged onto the surface of the carrier member (3) along a vertical line extending in parallel to the coil axis (9).
5. Tubular mixing device (6) with coiled configuration according to any of the preceding claims, **wherein** the fluids to be mixed are fed to the mixing

device (6) with a parallel orientation of the fluids interface with respect to the coil axis (9) at the inlet surface of the mixing device (6).

6. Tubular mixing device (6) with coiled configuration according to claim 5,
wherein the fluid is a liquid. 5
7. Use of a tubular mixing device (6) with coiled configuration according to any of the claims 1 to 5 for mixing of fluids in a laminar flow regime with $10 \leq Re \leq 3000$. 10
8. Use of a mixing device with coiled configuration according to claim 7 for mixing of fluids in a laminar flow regime with $Re \geq 500$. 15
9. Use of a mixing device according to any of the claims 7 or 8 for heat transfer applications. 20

20

25

30

35

40

45

50

55

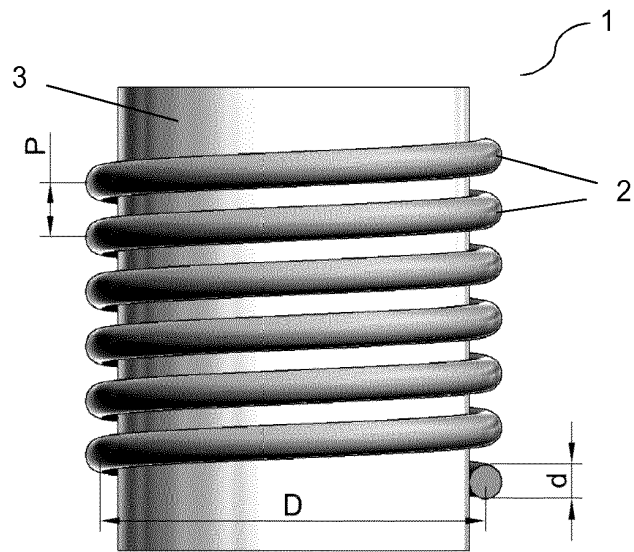


Fig. 1

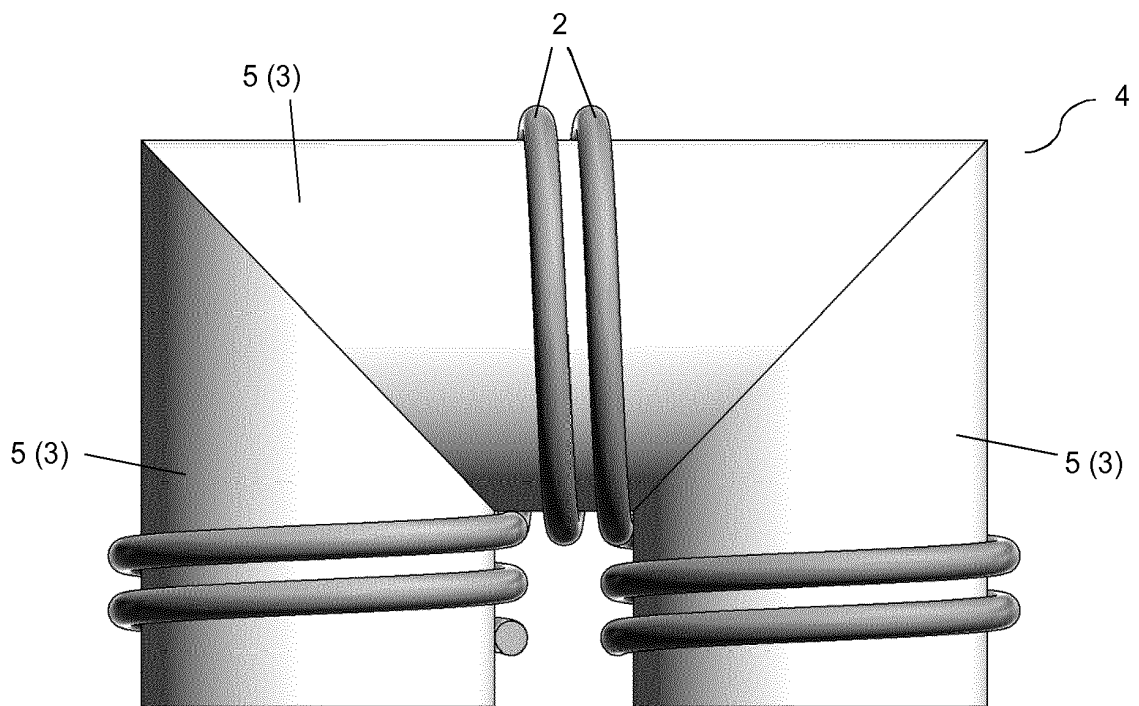


Fig. 2

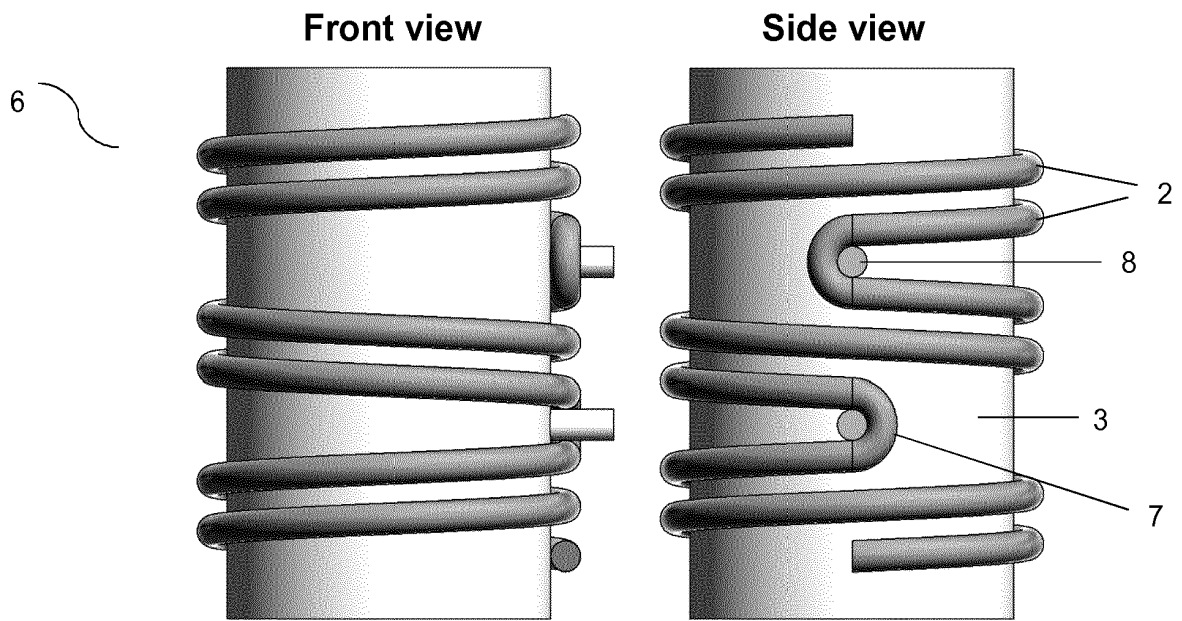


Fig. 3



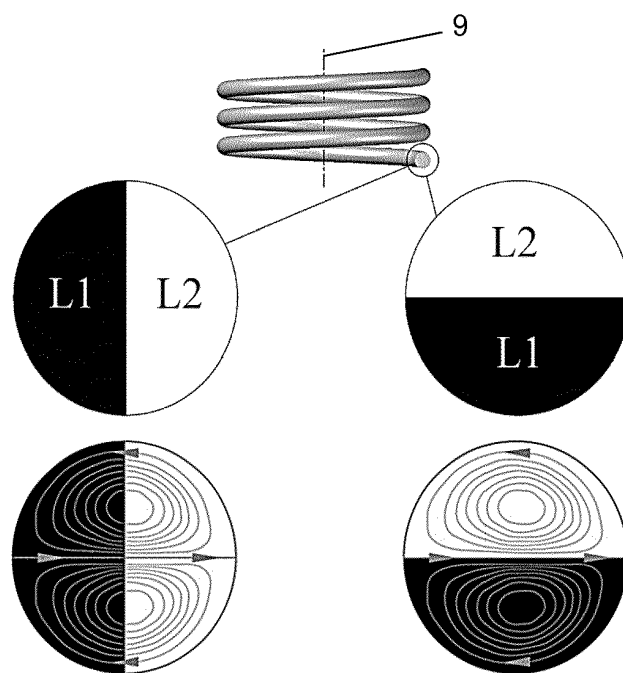



Fig. 4

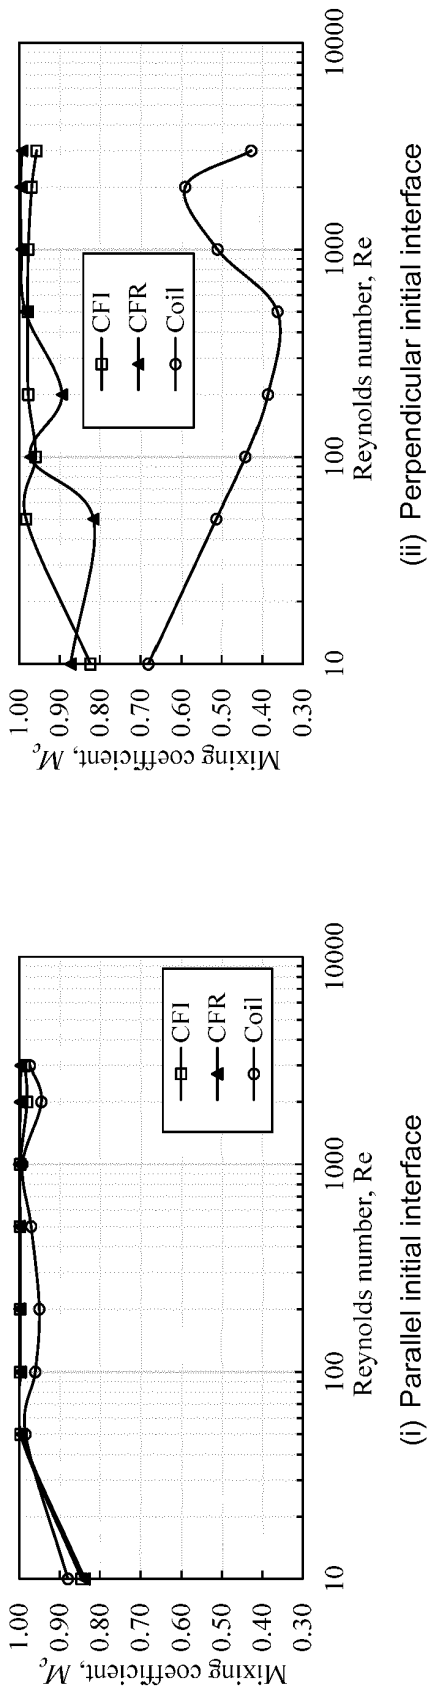

(a) 6-turn configurations

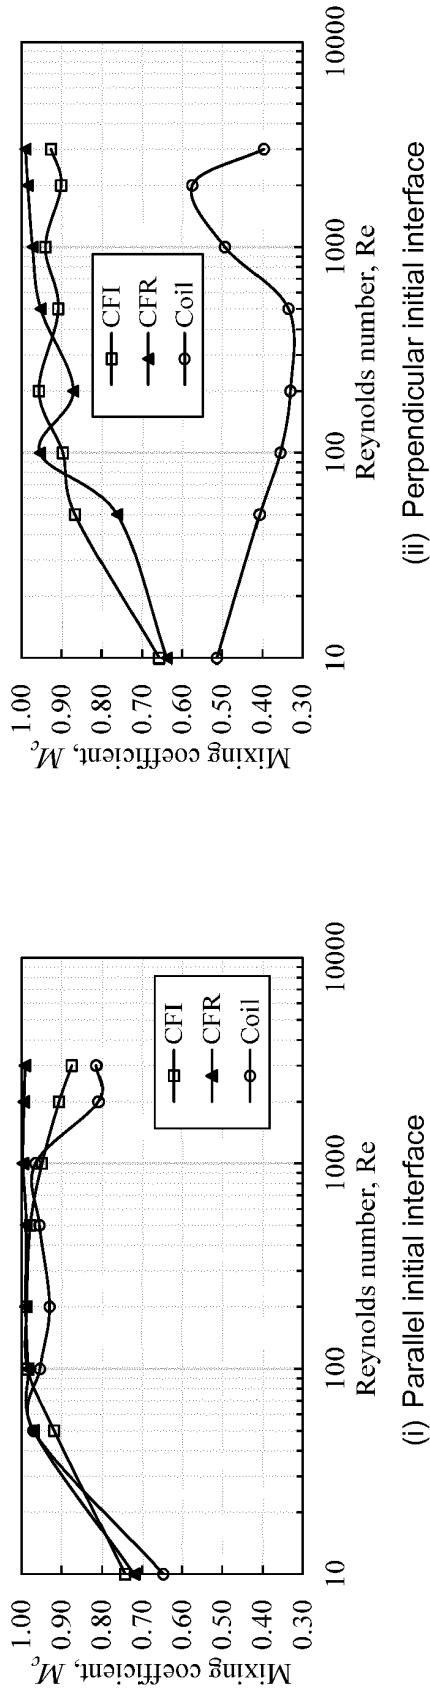


(b) 3-turn configurations

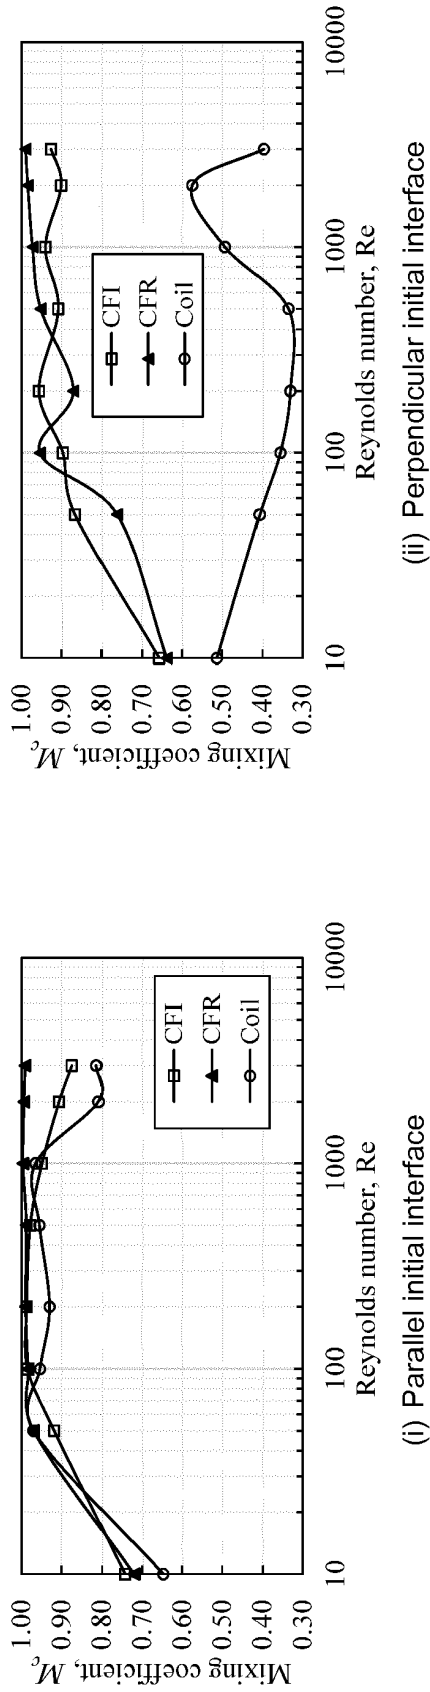


(ii) Perpendicular initial interface


Fig. 5

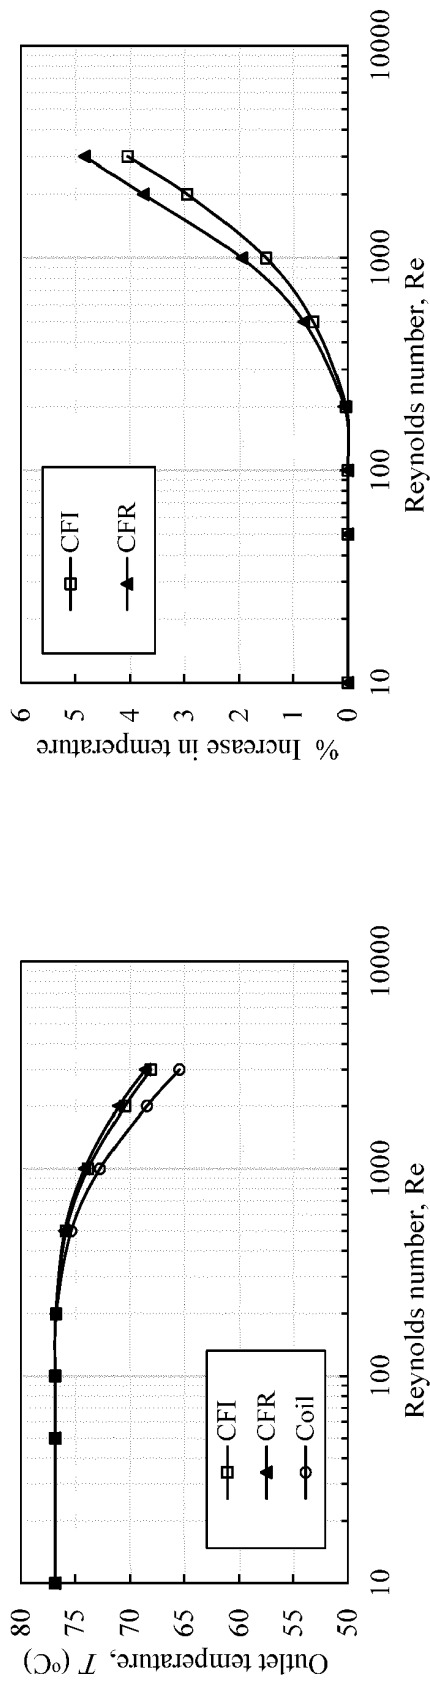


a) Parallel initial interface

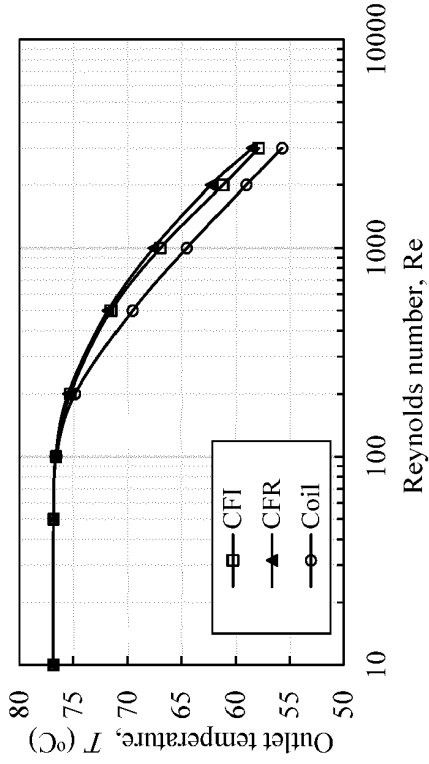

(i) Parallel initial interface

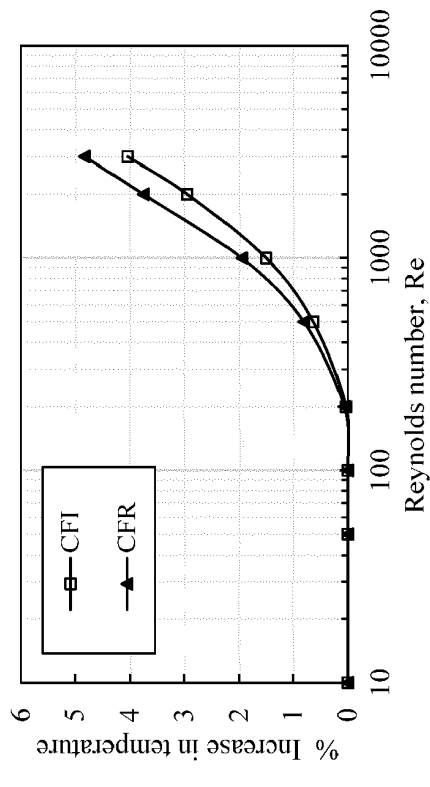

b) Perpendicular initial interface

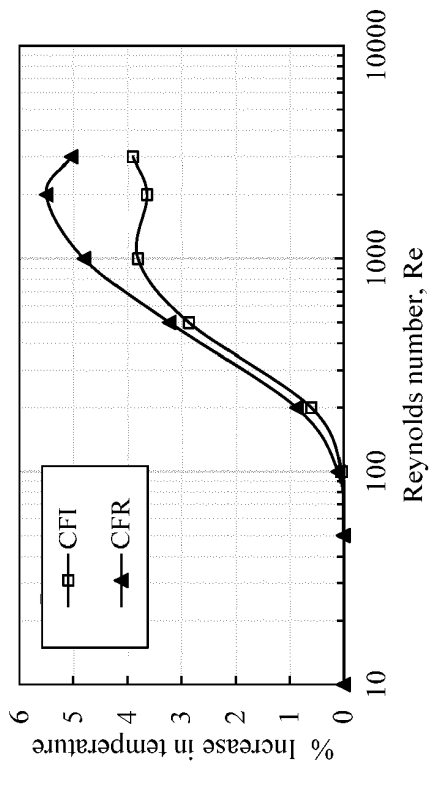

(ii) Perpendicular initial interface

(a) 6-turn configurations

(b) 3-turn configurations

Fig. 6

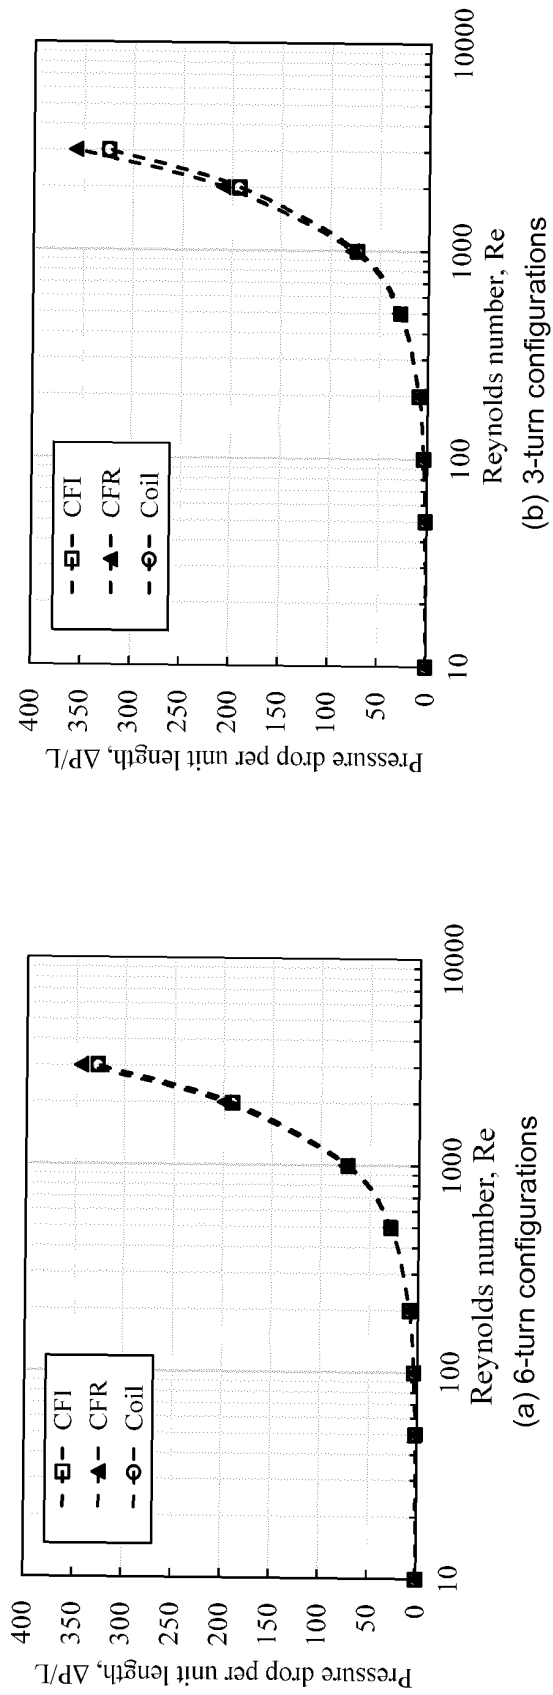


Fig. 7



EUROPEAN SEARCH REPORT

Application Number
EP 19 17 6360

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X A	WO 2004/046694 A1 (INT REMOTE IMAGING SYSTEMS INC [US]) 3 June 2004 (2004-06-03) * page 3, line 24 - line 31 * * page 6, line 14 - page 7, line 7 * * page 8, line 11 - page 9, line 19 * * figures 2A-3 *	1-7 8,9	INV. B01F5/06
X A	EP 0 045 558 A1 (TECHNICON INSTR [US]) 10 February 1982 (1982-02-10) * page 1, line 1 - line 5 * * page 2, line 20 - page 3, line 21 * * page 5, line 20 - page 6, line 15 * * page 10, line 27 - page 11, line 20 * * figures 1,2 *	1,5-8 2-4,9	
X A	WO 2011/059113 A1 (ASAHI ORGANIC CHEM IND [JP]; HANADA TOSHIHIRO [JP] ET AL.) 19 May 2011 (2011-05-19) * figure 1 *	1,5-7 2-4,8,9	
			TECHNICAL FIELDS SEARCHED (IPC)
			B01F
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 25 November 2019	Examiner Real Cabrera, Rafael
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 17 6360

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-11-2019

10

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 2004046694	A1	03-06-2004	AU 2003287678 A1	15-06-2004
			US 2004109386 A1	10-06-2004
			US 2006186899 A1	24-08-2006
			WO 2004046694 A1	03-06-2004

EP 0045558	A1	10-02-1982	AU 541368 B2	03-01-1985
			CA 1242434 A	27-09-1988
			DE 3170103 D1	30-05-1985
			EP 0045558 A1	10-02-1982
			JP H0153090 B2	13-11-1989
			JP S5753228 A	30-03-1982
			US 4422773 A	27-12-1983

WO 2011059113	A1	19-05-2011	JP 5484008 B2	07-05-2014
			JP 2011104482 A	02-06-2011
			WO 2011059113 A1	19-05-2011

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 7337835 B2, Nigam [0005]

Non-patent literature cited in the description

- **F. JIANG ; K. S. DRESE ; S. HARDT ; M. KÜPPER ; F. SCHONFELD.** Helical flows and chaotic mixing in curved micro-channels. *AIChE J.*, 2004, vol. 50 (9), 2297-2305 [0056]
- **L. DONG ; Z. SHUFEN.** Numerical and experimental investigation of the effect of geometrical parameters on the performance of a contraction-expansion helical mixer. *Int. J. Chem. React. Eng.*, 2014, vol. 12 (1), 465-475 [0056]
- **Y. LASBET ; B. AUVITY ; C. CASTELAIN ; H. PEERHOSSAINI.** Thermal and hydrodynamic performances of chaotic mini-channel: application to the fuel cell cooling. *Heat Transfer Eng.*, 2007, vol. 28 (8-9), 795-803 [0056]
- **A. ALAM ; K.-Y. KIM.** Analysis of mixing in a curved micro-channel with rectangular grooves. *Chem. Eng. J.*, 2012, vol. 181, 708-716 [0056]
- **M. MANSOUR ; Z. LIU G. JANIGA ; K. D. P. NIGAM ; K. SUNDMACHER ; D. THEVENIN ; K. ZÄHRINGER.** Numerical study of liquid-liquid mixing in helical pipes. *Chem. Eng. Sci.*, 2017, vol. 172, 250-261 [0056]
- **M. MANSOUR ; G. JANIGA ; K. D. P. NIGAM ; D. THEEVNIN ; K. ZÄHRINGER.** Numerical study of heat transfer and thermal homogenization in a helical reactor. *Chem. Eng. Si.*, 2018, vol. 177, 369-379 [0056]